

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10049188  
5000  
(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 July 2002 (18.07.2002)

PCT

(10) International Publication Number  
WO 02/056404 A1

(51) International Patent Classification<sup>7</sup>: H01M 8/02, B01J 23/42

(21) International Application Number: PCT/JP02/00252

(22) International Filing Date: 16 January 2002 (16.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2001-007655	16 January 2001 (16.01.2001)	JP
60/267,412	9 February 2001 (09.02.2001)	US
2001-228825	30 July 2001 (30.07.2001)	JP
60/308,855	1 August 2001 (01.08.2001)	US

Ohkawa-cho, Kawasaki-ku, Kawasaki-shi, Kanagawa 210-0858 (JP)

(74) Agents: ISHIDA, Takashi et al.; A. AOKI, ISHIDA & ASSOCIATES, Toranomon 37 Mori Bldg., 5-1, Toranomon 3-chome, Minato-ku, Tokyo 105-8423 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CE, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: CATALYST COMPOSITION FOR CELL, GAS DIFFUSION LAYER, AND FUEL CELL COMPRISING THE SAME

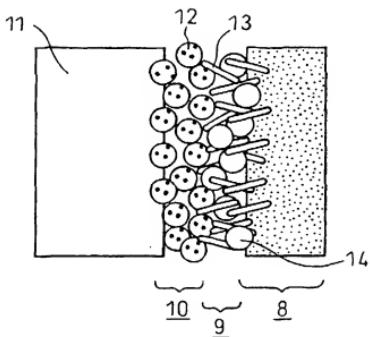

(57) Abstract: A catalyst composition for a cell comprising catalyst-bearing conductive powder particles and fibrous carbon. A membrane-electrode assembly for a fuel cell comprising an electrolyte membrane and an electrode including a catalyst layer and a gas diffusion layer, the electrode being provided on each surface of the electrolyte membrane, wherein at least a portion of the surface of the gas diffusion layer which is in contact with the catalyst layer includes a layer containing a hydrophobic resin and fibrous carbon.